

# PANZERI

EAST

220-240V AC

XGQ1004



Lighting fixture for ceiling or wall built-in installation for interiors, with direct light emission. Total built-in plaster structure for masonry or plasterboard. Light source retaining spring clip in stainless steel. Fixing brackets in micro-perforated sheet metal. Recessed housing for masonry in galvanized sheet metal to be ordered separately. Built-in hole dimension: 125x125mm (4,9x4,9")


## Data sheet

CODE	XGQ1004
SYSTEM POWER CONSUMPTION	Max 50W
LIGHT SOURCE	LED Retrofit / Halogen
LIGHT SOURCE KIT	Not Included
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
WEIGHT	0,46 Kg
PROTECTION DEGREE	IP20
PACKING DIMENSIONS (CM)	21,0 x 27,0 x 14,0

Plaster



# Technical drawing

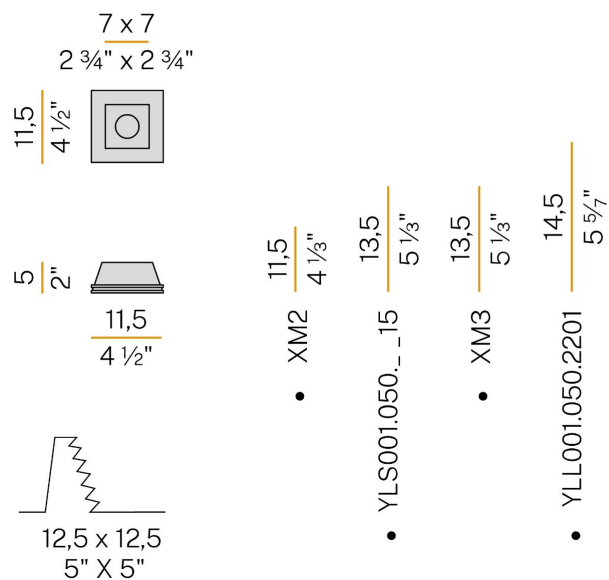

## Accessories / source - power supply


XM2

GU5,3 lampholder, cable and terminal block kit.




XM6-20 D/P MULTI

LED driver, 9,2=20,4W 200±900mA,  
1-10V/ALI/Push DIM dimmable.




## XM6-25 D/P MULTI

LED driver, 8,4±25,6W 150±900mA,  
DALI/Push DIM dimmable.



## XM6/250/10

LED driver, 10W 250mA.



## YLL001.050.2201

PAR16 LED lamp GU10 7,5W 220-240V  
AC 3000K Ra>80 680lm 60°, not  
dimmable.



## YLS001.050.1715

LED lamp 8,5W 250mA 35V 2700K  
Ra>90 806lm 35°.



## YLS001.050.2515

LED lamp 8,5W 250mA 35V 3000K  
Ra>90 854lm 35°.



LED lamp 8,5W 250mA 35V 4000K  
Ra>90 1053lm 35°.

YLS001.050.2915



---

Accessories / fixing