



**401801-02-03 HYDROFLEX MINI LED** 

1.000 / 3.000 / 5.000 mm length,  
10mm x 10mm section, opal encapsulated  
flexible LED strip for linear lighting  
(straight or bended) outdoor  
and indoor wall-recessed installation;  
surface mounted version through installation  
accessories to be ordered separately.  
LED circuit completely encapsulated  
with UV and high-temperatures resistant  
Polyurethane sheath, with white (outside)  
and milky finish (over light emission),  
dot free and homogeneous light emission  
surface. Double power cable with male/  
female connectors included,  
suitable for in-line installation.  
Cuttable every 50 mm.  
Remote driver 24V DC needed.  
With low-power SMD3014 Lumileds LED.  
IP68 rating.




**Energy Label** 

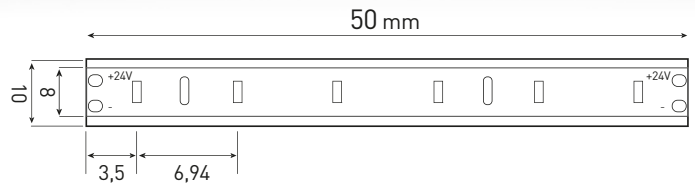

- Material: high performances Polyurethane, UV resistant, saltwater resistant.
- No yellowish after years
- Dot-free and homogeneous light emission.
- 24V DC remote driver needed
- Supplied with Male/Female connectors for in-line installation.







**401801 HYDROFLEX MINI 1000 LED** 



**FullRGB**  
AVAILABLE ON REQUEST


	LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
10 WATT 24V DC IP68	LOW-POWER LED	 3.000°K WARM-WHITE	DIFFUSED	750	75.00	 MILKY

**REMOTE DRIVER SELECTION**

BRAND	MANUFACTURER CODE	TYPE	WATT	IP RATE	NUMBERS OF FIXTURES
 MEANWELL	LPV-20-24	CONSTANT VOLTAGE 24V DC	20W	IP67	1
 MEANWELL	LPV-35-24	CONSTANT VOLTAGE 24V DC	35W	IP67	MIN 1 - MAX 2
 MEANWELL	LPV-60-24	CONSTANT VOLTAGE 24V DC	60W	IP67	MIN 1 - MAX 5
 MEANWELL	LPV-100-24	CONSTANT VOLTAGE 24V DC	100W	IP67	MIN 1 - MAX 9

**401802** HYDROFLEX MINI 3000 LED **NEW**

300 cm



AVAILABLE ON REQUEST


	LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
30 WATT 24V DC IP68	LOW-POWER LED	3.000°K WARM-WHITE	DIFFUSED	2.250	75.00	<input type="checkbox"/> MILKY

**REMOTE DRIVER SELECTION**

BRAND	MANUFACTURER CODE	TYPE	WATT	IP RATE	NUMBERS OF FIXTURES
MEANWELL	LPV-35-24	CONSTANT VOLTAGE 24V DC	35W	IP67	1
MEANWELL	LPV-100-24	CONSTANT VOLTAGE 24V DC	100W	IP67	MIN 1 - MAX 3

**401803** HYDROFLEX MINI 5000 LED **NEW**

500 cm



AVAILABLE ON REQUEST

	LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
50 WATT 24V DC IP68	LOW-POWER LED	3.000°K WARM-WHITE	DIFFUSED	3.750	75.00	<input type="checkbox"/> MILKY

**REMOTE DRIVER SELECTION**

BRAND	MANUFACTURER CODE	TYPE	WATT	IP RATE	NUMBERS OF FIXTURES
MEANWELL	LPV-100-24	CONSTANT VOLTAGE 24V DC	100W	IP67	1

**AC028** MOUNTING CLIP FOR HYDROFLEX MINI **NEW**

Mounting clip for Hydroflex Mini, realized in Stainless steel, clip to be applied every 40 cm, to secure with screws. Ideal for bended installation on a wall or ceiling.



**AC029** ALUMINUM LINEAR PROFILE FOR HYDROFLEX MINI **NEW**

1.000 mm Linear profile for Hydroflex Mini, realized in Anodized aluminum, supplied with nr. 2 clips to be applied every 40 cm, to secure with screws. Ideal for straight installation on a wall or ceiling.



**AC030** END CAP FOR HYDROFLEX MINI **NEW**

End cap for Hydroflex Mini, realized in Polyurethane, to be applied at the end of the line, after Hydroflex cut.

