



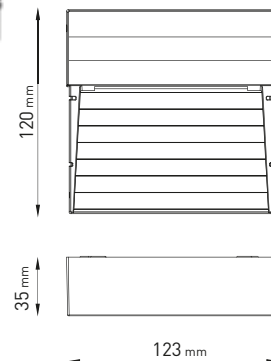

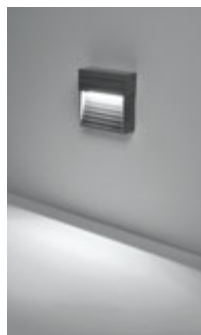


Square wall surface-mounted luminaire for outdoor installation on a wall, no recess needed. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, tempered safety glass, moulded silicone gasket and stainless steel screws. Built-in LED driver 220-240V 50-60Hz, with 6 mid-power CREE XH-G LED. IP65 rating.

Energy Label A++

- Material: high corrosion resistance die-cast copper-free aluminum body and frame.
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 6 x CREE XH-G LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Tempered safety glass
- M12 rubber grommet Rutaseal® in EPDM



	LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
4 WATT 220-240V 50-60HZ ELECTRONIC IP65 0,60 KG UNIT GROSS WEIGHT	MID-POWER LED	 3.000°K WARM-WHITE	 FLOOR WASHER 180°	350	87.50	 TEXTURED GREY  MATT WHITE <i>(ON REQUEST)</i>  MATT BLACK <i>(ON REQUEST)</i>