



ADRIA 1-5, ADRIA L 1-5, ADRIA S 1-5

Applications: housing constructions, hotels, schools, cultural premises

Mounting: ceiling

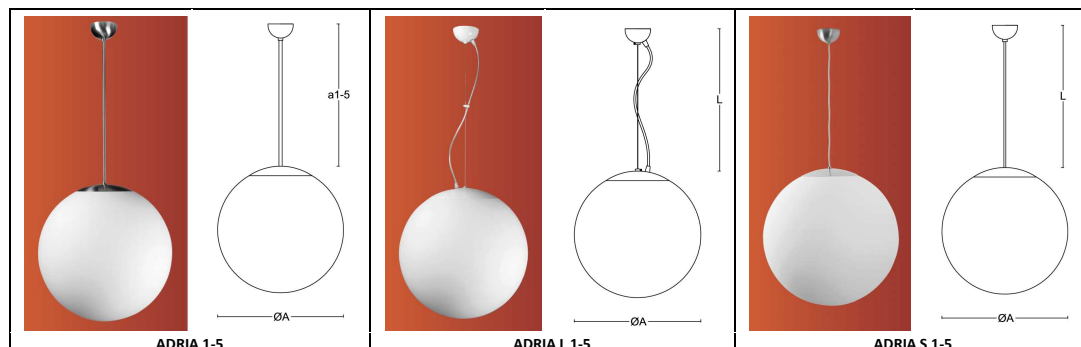

Technical data:

Light source	Incandescent lamp	Saving compact fluorescent lamp	LED module Osmont L02A
Chromacity temperatures	-	-	3000K, 4000K
CRI	-	-	3000K Ra>80, 4000K Ra>80
Ballast/LED driver	-	Electronic	LED driver 30-40W SELV
Energy class	By source	By source	A+
Input voltage	230V		
IP	IP 40		
Pendant	Bar (ADRIA) – steel, stainless steel or brass bar Wire (ADRIA L) – steel wire pendant and transparent supply cable Cable (ADRIA S) – transparent or white cable		
Shade	Three-layers, hand blown glass - TRIPLEX OPAL with matt surface		
Shade attachment	Steel holder		

ADRIA		ADRIA L		ADRIA S	
Type	Lenght [mm]	Type	Lenght [mm]	Type	Lenght [mm]
a1	200	L100	1000	L100	1000
a2	400	L200	2000		
a3	600				
a4	800				
a5	1000				

Variants:

	Type	ØA [mm]	Input [W]	Socket	Type of fluorescent lamp	T [hrs]	Light flux in emergency mode [%]	Type of battery
ADRIA 1	Z11/092/a.	200	75	E27	-	-	-	-
ADRIA L1	Z111/092/L...	200	75	E27	-	-	-	-
ADRIA S1	Z511/092/L100	200	75	E27	-	-	-	-
ADRIA 2	Z11/094/a.	300	100	E27	-	-	-	-
	E-16Z11/094/a.		26	G24q3	TC-DEL	-	-	-
	E-25Z11/094/a.		2x18	2xG24q2	TC-DEL	-	-	-
ADRIA L2	Z111/094/L...	300	100	E27	-	-	-	-
	E-46Z11/094/L...		26	G24q3	TC-DEL	-	-	-
	E-28Z11/094/L...		2x18	2xG24q2	TC-DEL	-	-	-
ADRIA S2	Z511/094/L100	300	100	E27	-	-	-	-
	E-46Z511/094/L100		26	G24q3	TC-DEL	-	-	-
	E-28Z511/094/L100		2x18	2xG24q2	TC-DEL	-	-	-
ADRIA 3	Z11/096/a.	400	150	E27	-	-	-	-
	E-26Z11/096/a.		2x26	2xG24q3	TC-DEL	-	-	-
	E-28Z11/096/a.		2x42	2xGX24q4	TC-TEL	-	-	-
	NKC-226Z11/13/096/a.		2x26	2xG24q3	TC-DEL	1	6,5	Ni-Cd 3,6V/1,6Ah
ADRIA L3	Z111/096/L...	400	150	E27	-	-	-	-
	E-26Z11/096/L...		2x26	2xG24q3	TC-DEL	-	-	-
	E-28Z11/096/L...		2x42	2xGX24q4	TC-TEL	-	-	-
	NKC-226Z11/13/096/L...		2x26	2xG24q3	TC-DEL	1	6,5	Ni-Cd 3,6V/1,6Ah
ADRIA S3	Z511/096/L100	400	150	E27	-	-	-	-
	E-26Z511/096/L100		2x26	2xG24q3	TC-DEL	-	-	-
	E-28Z511/096/L100		2x42	2xGX24q4	TC-TEL	-	-	-
	NKC-226Z511/13/096/L100		2x26	2xG24q3	TC-DEL	1	6,5	Ni-Cd 3,6V/1,6Ah
ADRIA 4	Z11/098/a.	500	150	E27	-	-	-	-
	E-26Z11/098/a. 32W		2x32	2xGX24q3	TC-TEL	-	-	-
	E-46Z11/098/a.		4x26	4xG24q3	TC-DEL	-	-	-
	E-38Z11/098/a.		3x42	3xGX24q4	TC-TEL	-	-	-
	NKC-232Z11/16/098/a.		2x32	2xGX24q3	TC-TEL	1	9	2x Ni-Cd 3,6V/1,6Ah
ADRIA L4	Z111/098/L...	500	150	E27	-	-	-	-
	E-26Z11/098/L... 32W		2x32	2xGX24q3	TC-TEL	-	-	-
	E-46Z11/098/L...		4x26	4xG24q3	TC-DEL	-	-	-
	E-38Z11/098/L...		3x42	3xGX24q4	TC-TEL	-	-	-
	NKC-232Z11/16/098/L...		2x32	2xGX24q3	TC-TEL	1	9	2x Ni-Cd 3,6V/1,6Ah

	Type	ØA [mm]	Input [W]	Socket	Type of fluorescent lamp	T [hrs]	Light flux in emergency mode [%]	Type of battery
ADRIA S4	ZS11/098/L...	500	150	E27	-	-	-	-
	E-26ZS11/098/L...32W		2x32	2xGX24q3	TC-TEL	-	-	-
	E-46ZS11/098/L...		4x26	4xGX24q3	TC-DEL	-	-	-
	E-38ZS11/098/L...		3x42	3xGX24q4	TC-TEL	-	-	-
	NKC-232ZS11/16/098/L...		2x32	2xGX24q3	TC-TEL	1	9	2x Ni-Cd 3,6V/1,6Ah
ADRIA 5	Z11/099/a.	600	150	E27	-	-	-	-
	Z11/3/099/a.		3x60	3xE27	-	-	-	-
	E-38Z11/099/a.		3x42	3xGX24q4	TC-TEL	-	-	-
	E-48Z11/099/a.		4x42	4xGX24q4	TC-TEL	-	-	-
ADRIA L5	ZL11/099/L...	600	150	E27	-	-	-	-
	ZL11/3/099/L...		3x60	3xE27	-	-	-	-
	E-38ZL11/099/L...		3x42	3xGX24q4	TC-TEL	-	-	-
	E-48ZL11/099/L...		4x42	4xGX24q4	TC-TEL	-	-	-
ADRIA S5	ZS11/099/L100	600	150	E27	-	-	-	-
	ZS11/3/099/L100		3x60	3xE27	-	-	-	-
	E-38ZS11/099/L100		3x42	3xGX24q4	TC-TEL	-	-	-
	E-48ZS11/099/L100		4x42	4xGX24q4	TC-TEL	-	-	-

LED variants:

	Type	ØA [mm]	Input [W]	Luminous flux of LED modules [lm]	
				3000K	4000K
ADRIA 1	LED-5L01Z11/092/a...000	200	10	630	710
ADRIA L1	LED-5L01ZL11/092/L...000				
ADRIA S1	LED-5L01ZS11/092/L100...000				
ADRIA 2	LED-5L02A07Z11/094/a...000	300	24	2460	2630
ADRIA L2	LED-5L02A07ZL11/094/L...000				
ADRIA S2	LED-5L02A07ZS11/094/L100...000				
ADRIA 3	LED-5L02A10Z11/096/a...000	400	37	3280	3510
ADRIA L3	LED-5L02A10ZL11/096/L...000				
ADRIA S3	LED-5L02A10ZS11/096/L100...000				
ADRIA 4	LED-10L02A07Z11/098/a...000	500	47	4750	5250
ADRIA L4	LED-10L02A07ZL11/098/L...000				
ADRIA S4	LED-10L02A07ZS11/098/L100...000				
ADRIA 5	LED-10L02A09Z11/099/a...000	600	61	5820	6230
ADRIA L5	LED-10L02A09ZL11/099/L...000				
ADRIA S5	LED-10L02A09ZS11/099/L100...000				

.000 – 3000K or 4000K

